

## Description

GM-20P is a great solution for these locations where a safe system of communication is required.

It is specially recommended for cinemas, theaters, banks...and any information or selling point where a glass divides the two people for reasons of security.




## Features

- Input voltage: 9Vdc.
- Loudspeaker power: 400mW.
- Consumption during communication: 300mA.
- Consumption during standby: 150mA.
- Flexible speaker length: 380mm.
- Base dimensions: 115 (W) 65 (H) 170 (D) mm.
- External speaker dimensions: 85 (Ø) 30 (D) mm.
- External speaker cable length: 3 meters.
- Weight 1,1 Kg.

## Options

## Diagram

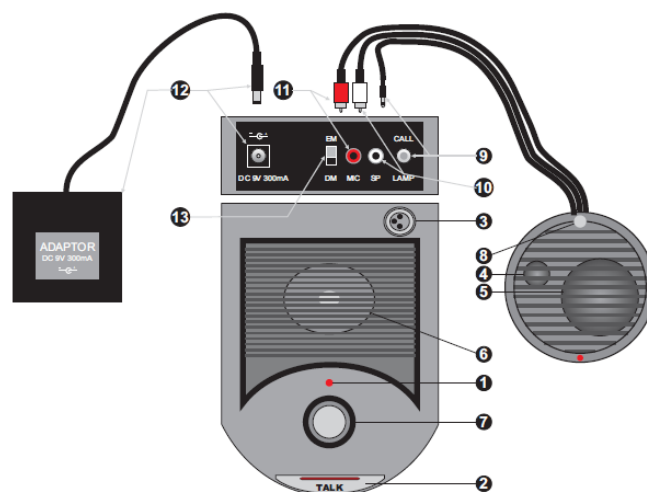

- 1- On/Off signalization Led.
- 2- Microphone activation.
- 3- Microphone connector.
- 4- External microphone.
- 5- External speaker.
- 6- Internal peaker.
- 7- Volume control.
- 8- External call button.
- 9- Connector and cable for the external call button.
- 10- Connector and cable for the external speaker.
- 11- Connector and cable for the external microphone.
- 12- Power supply connector.
- 13- Selector for the flexible microphone.
- 14- Volume for the flexible microphone.

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.