




2Easy-IX IP Network Video Intercom System

Holars AB / Holars AS

Economical, Easy, Efficient IP Intercom System

Products

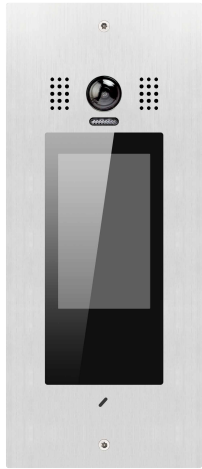

IX850

Door Station

Touch screen with
stainless steel surface



IX821

Door Station

Touch Key with
stainless steel surface



IX610

Door Station


Villa/video door bell



IX471

Monitor

Touch screen



IX439

Monitor

Touch screen with
glass surface

V-TEC

2Easy-IX IP Intercom System



PoE

Support Standard PoE (50V) as device power supply, one cable for all.



Fisheye Camera

170 degree wide angle fisheye camera.



IP Camera Integrated

Support monitor Onvif IP Camera from indoor unit and guard unit.



Easy Configure

Plug and play, auto configure for names/numbers/IP address.

Benefit Dealer

Best choice for project sales

2Easy-IX IP intercom is highly stable, all function or menu could be customized and easy to install with only 15 minutes training.



Stable

System running stable without maintenance



Economical

Competitive price for IX devices



Specialized

Special design for small or middle buildings



Customizable

Customize for Logo even your own user interface





Easy

Easy to install with a short time training




Integrate

IP Camera and Elevator control integrate




Installer's choice



One Cable for ALL

Support IEEE 802.3 af PoE Lan switch, one cable for all connect.



Offline IP auto-config

Automatically self-config IP address without DHCP (within 256 devices), simple as traditional door phone.



Remote Config

Remote config or update devices from any connected door station or monitor, even via cloud in future*



Free PC Software


Free PC software for configure and maintain. IX-Builder and IX-Device.

End User



Self Manage Access

Add or delete Pin code or Card on monitor only, don't need PC software to manage access control.



Sync Name To Doors

End user could set their room name which will be automatically sync to door station.




IP Camera Mange

Manage IP camera connected on the system, spy or switch to camera during a call.



Multi Channels

Multi channel allow users to have multi conversation in the same time.

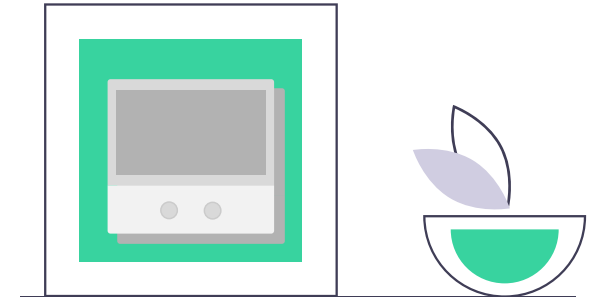

Single House

Typical one family installation

Multi door station for garage and gate, with additional CCTV cameras check with gate from a different angle.




32

Maximum 32 monitors for one family



32

Maximum 32 video door bell for one family

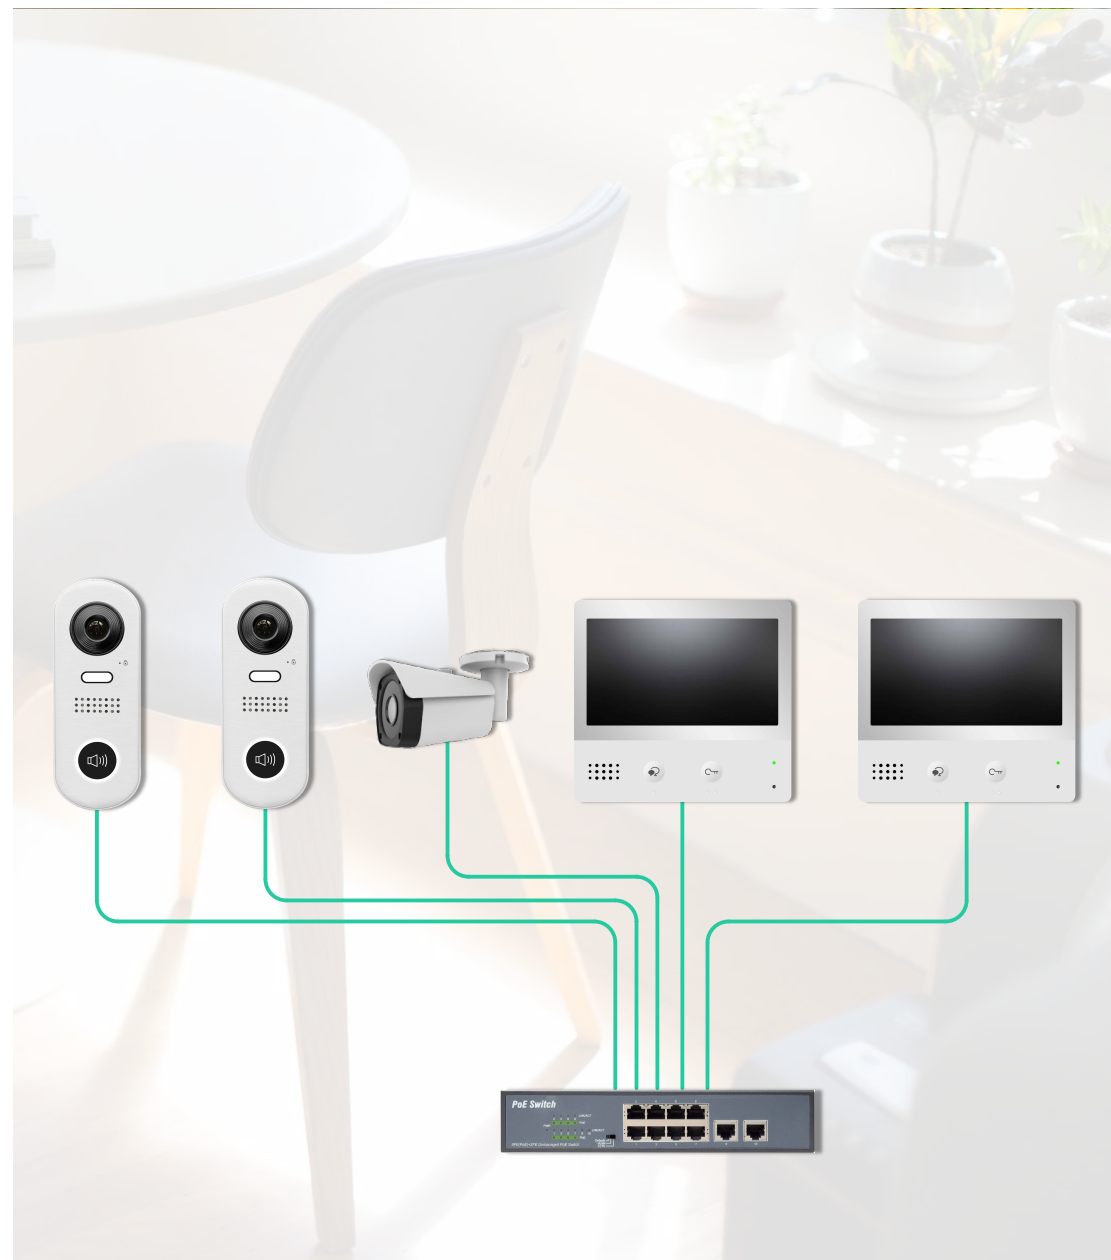

Standalone Building with Multi entrances


Typical standalone building

Multi door station for different entries, with additional CCTV cameras check with gate from a different angle.




256

Maximum 256 self-config IP Monitors




32

Maximum 32 video door bells for each Apt



32

Maximum 32 doors for one building

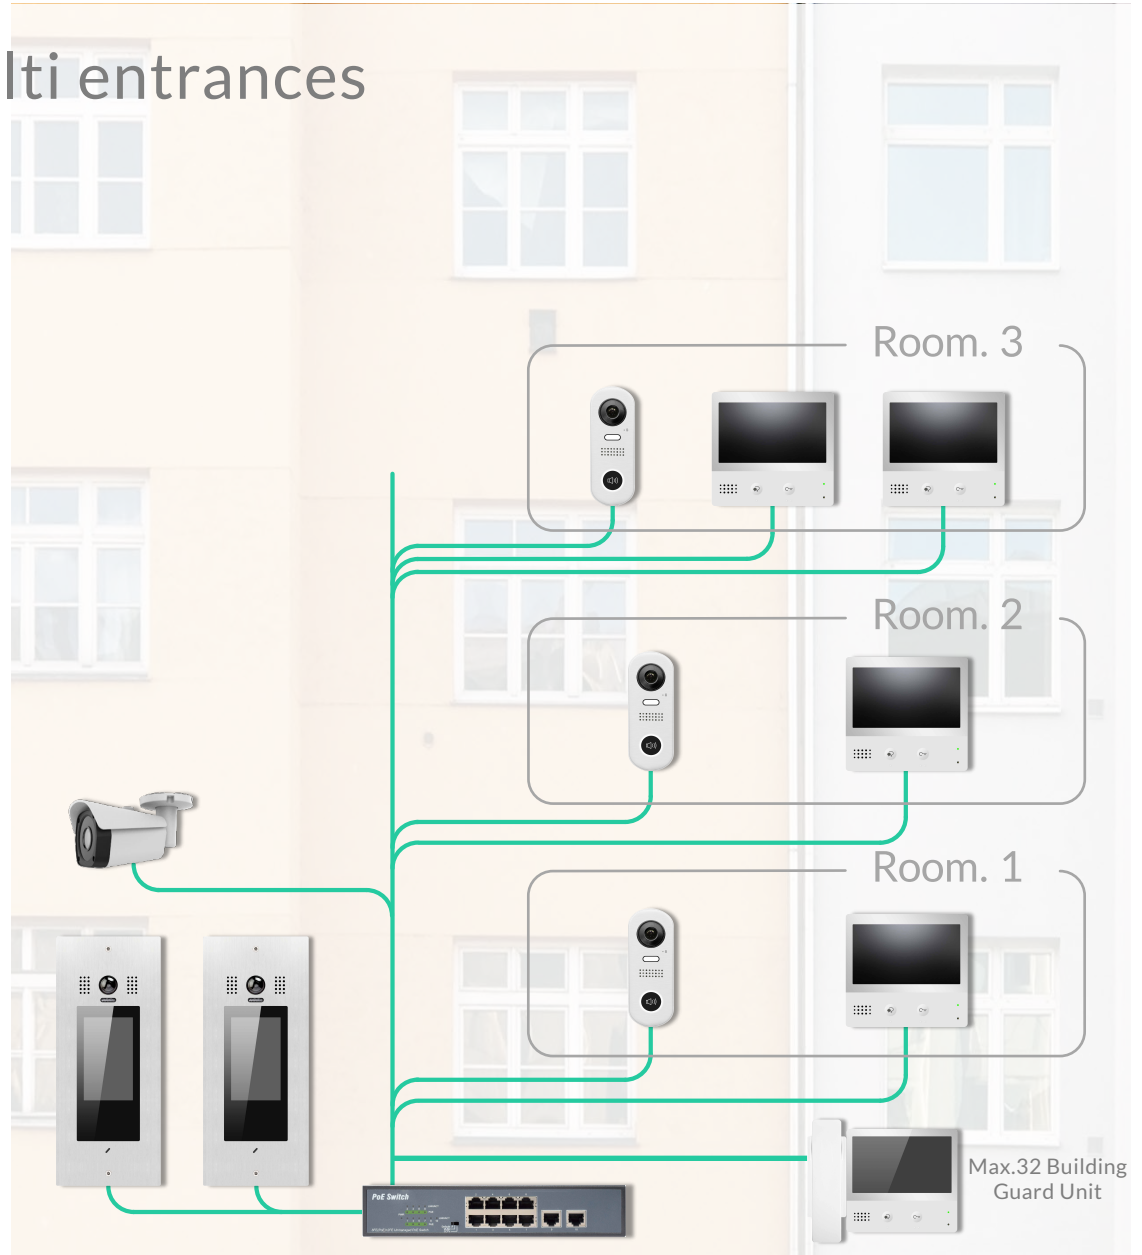

Complex


Typical Complex Buildings

Multi buildings, share with two gates, guard unit calls could call each room with an IP camera image.




8000

Maximum 8000 Monitors




32

Maximum 32 video door bells for each Apt



32

Maximum 32 doors for each building or common gate

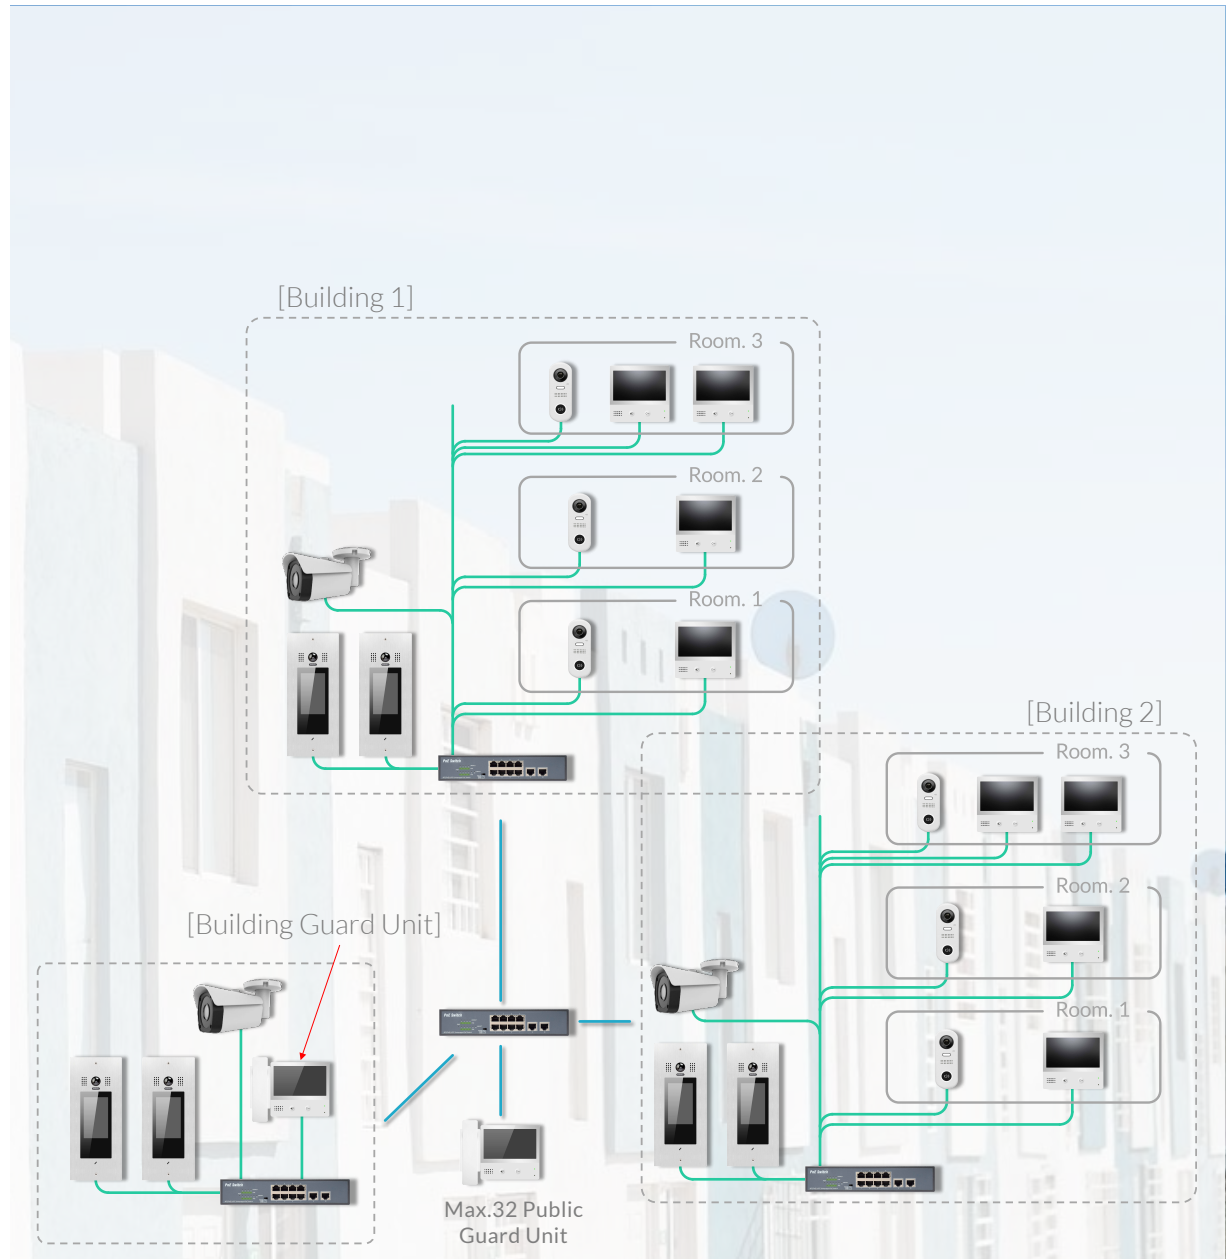

IX850

Door Station

For small or middle building entry door station, with card and pin code access control for users.



Fingerprint-proof
Stainless steel surface



5 inch TFT display
With touch glass screen



All menu could customize
multi language, user interface




170° wide angle fisheye camera.
Economical normal camera version*



Support both 13.56Mhz and 125Khz card.
Dual car reader



Surface mounting

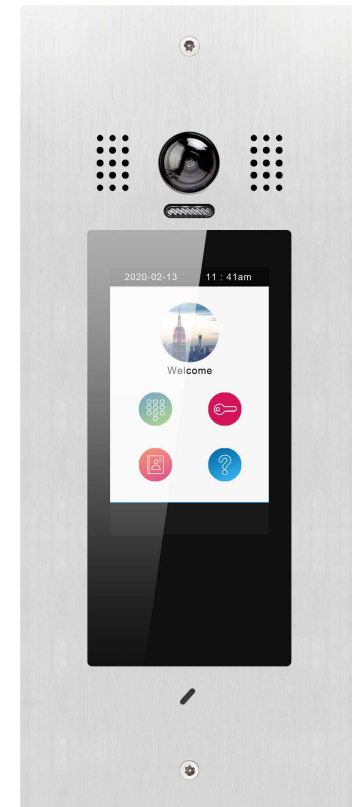

Flush mounting

IX821

Modular Door Station

Modularize door station allow users to select their own functions, with below modules the door station could call via room number, unlock by 13.65Mhz and 125Khz cards, or simply just call by metal touch button.



821-VD

Main camera module



821-DR

Dot display card reader



821-MK

Mechanical keypad



821-S4

Touch sensor call button




821-LB

Backlight info board



821-BM

Blank block

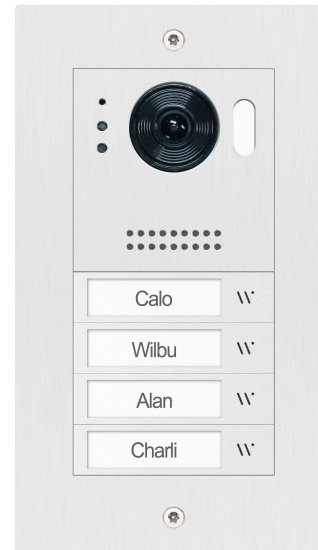

2 Modules Door station
Surface/Flush mounting



3 Modules Door station
Surface/Flush mounting

V-TEC 2EASY-IX SYSTEM

Indoor Monitor IX471

Screen

7Inch touch screen



Handset

Support handset accessory



Alarm

Maximum 8 alarm zooms



Transfer

Transfer call to APP.



Customizable

Logo, Menu, UI.



Elevator control

Support elevator control



V-TEC 2EASY-IX SYSTEM

Guard Unit GL471



Camera View

GL471 could pair with an IP Camera as its' own camera, when calling to other monitor, showing paired IP Camera's image.



Handset Optional

GL471 could work with handset or without handset.



Desk Mount

Support desk mount, special for secure room or reception.




Transfer

Transfer calls to APP when the devices is unattended.

V-TEC 2EASY-IX SYSTEM

Free PC Software

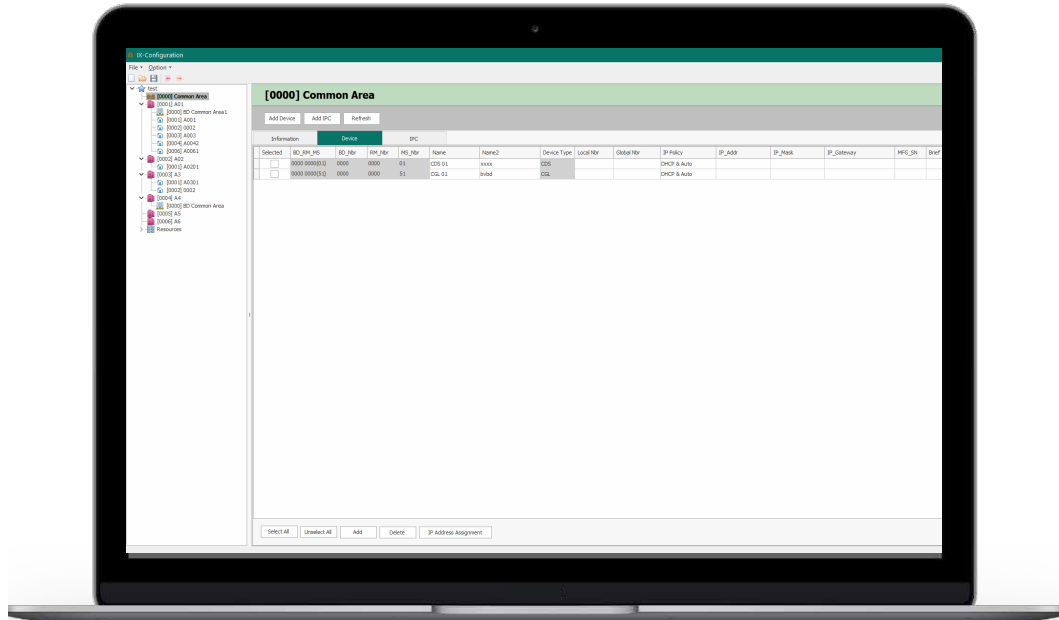

Batch configure device

Configure online devices by one click.



Maintain exist project

Load project setup form any device to maintain.

Information

Basic

Power Source:

Power-over-Ethernet (IEEE 802.3af Class 0)

LAN Interface:

10 BASE-T / 100 BASE-TX Ethernet (RJ-45)

Network Protocols:

TCP, UDP, SIP, DHCP, AUTOIP, TFTP, RTSP, RTP, RTCP, IGMP, MLD, NTP, DNS

Media codec:

Audio, G.711; Video, H.264

Bandwidth Usage:

Audio, 128Kbps; Video, 24Kbps ~ 8,192Kbps

Communication :

Hands-free

Wire Type:

Cat-5e or Cat-6

Wiring Distance:

100m (Approx. 330')

Operating temperature:

-10 to +50 (oC)

Device

IX610/IX850:

DC7121 Camera Type 1/3.7" Ultra Sense, ISP with 77dB WDR

Len angle: 170 degree with Fisheye correction

Minimum illumination: 5 lux

NT99141 Camera

 Type 1/4" CMOS

Len angle: 90 degree

Minimum illumination: 8 lux

TFT Screen

TFT Screen (IX471) 7 inch, 800*480 resolution

TFT Screen (IX439) 4.3 inch, 480*272 resolution


TFT Screen (IX850) 5 inch, 480*800 resolution

All door stations


Ingress Protection IP65

Impact Protection IK08


Dimensions




IX439




IX471



GL471

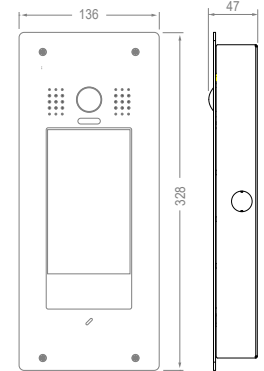

IX850

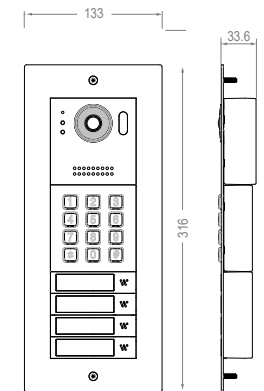

IX821



Holars AS

Trondheimsvegen 590
2092 Minnesund
info@holars.no www.holars.no
Telefon: 63961700

Holars AB

Brukets väg 26
746 93 Bålsta
info@holars.se www.holars.se
Telefon: 08-68409910